


CUMING MICROWAVE

Technical Bulletin 320-9D

C-RAM PIM 465 FR 700 MHz-3 GHz FLAME RETARDANT REFLECTIVITY FOAM

RoHS
Compliant

C-RAM PIM 465 FR is a line of flame retardant indoor reflectivity foam sheet material, comprised of urethane foam and a lossy carbon loading. C-RAM PIM 465 FR absorbs RF microwave energy across 700 MHz through 3 GHz. frequencies. C-RAM PIM 465 FR has proven to be ideal for PIM reduction, mainly used to cover metallic surfaces. It can also be used to cover fences. The open-cell structure permits airflow freely through the absorber.

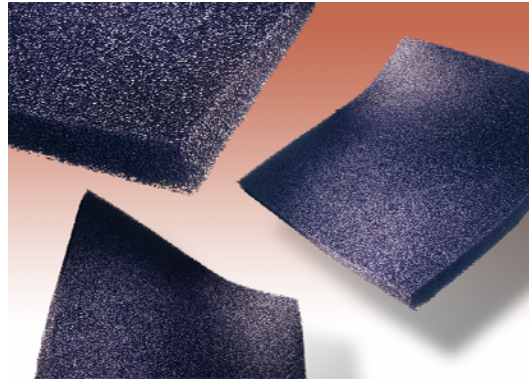

TYPICAL PROPERTIES

| | |
|-------------------------------|-------|
| Porosity, pores per inch: | 30-80 |
| Tensile strength, psi: | 8-12 |
| Tear strength, lb/inch width: | 2.2 |
| Density, lb/ft ³ : | 3.0 |
| Ultimate elongation (%) max: | 275 |

Environmental Properties

| | |
|--|-------|
| Operating temp., max: | 200°F |
| Ozone adverse affects: | No |
| Fungus Resistance, Evidence of fungus growth: | No |

TYPICAL REFLECTIVITY

(dB down from reference)

C-465

| <u>Thk.</u> | <u>Performance</u> | <u>Freq. Range</u> |
|-------------|--------------------|--------------------|
| 2.5" | -12 dB | 700 MHz-3GHz |

METHOD OF APPLICATION

Typically C-RAM PIM 465 FR can be adhered in place using neoprene contact adhesives or it can be mechanically fastened using low dielectric plastic fasteners. C-RAM PIM 465 FR is easily cut by band saw, utility knife, or shears. It is easily applied to curves or cut to fit into various sizes.

AVAILABILITY

C-RAM PIM 465 FR is available in standard sizes of 24x24in (610x610mm) and 24x48in (610x1220mm) Other sizes are available. Cuming Microwave can also supply parts cut to drawings. Consult the factory for other sizes.

The information in this technical bulletin, although believed to be accurate, is not to be taken as a warranty for which Cuming Microwave assumes legal responsibility, nor as permission or recommendation to practice any patented invention without license. It is offered for verification by the customer, who must make the final judgment of suitability for any application.